

RX Tiger

ACCUREX



Heavy duty floor scales

Suitable for weighing pallets and heavy loads, with a capacity of up to 3,000 kg


- Floor platform with 4 load sensors.
- Floor or recessed* Installation.
- Highly robust sandwich-type structure, with epoxy treatment.
- OIML R-60 class C load cells in nickel-plated steel, IP67 protection.
- ABS junction box with IP66 protection.
- Height adjustable feet to adapt to surface.
- With LED display RX indicator and 400 cm cable.

** Except for models 88 and 1010.*

Accurex RX Tiger scales are for professional that withstand robust, intensive handling. They are manufactured with a steel structure, epoxy treatment and a highly reliable RX electronic indicator.

The RX indicator has 4 metres of cable and can be located away from the platform. Weighing response is extremely fast, in less than 2 seconds, and shows a stable, accurate weight.



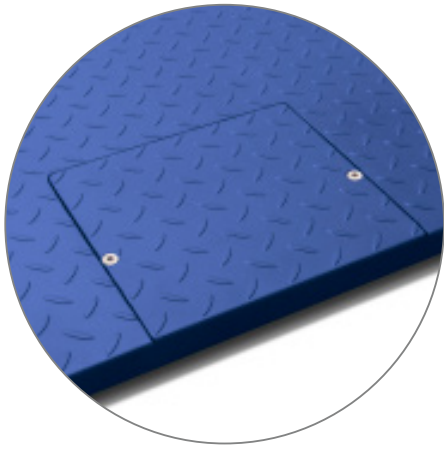

Operational functions

- Zero adjustment.
- Container taring with tare memory.

Zero adjustment function. The balance zero is re-set at the touch of a button

Tare function. The weight of an empty pallet or any other container can be discounted by pressing the tare key.

It is powered by a 220 V mains supply and includes an internal battery which is recharged via the mains cable. The battery recharges when connected to the mains while the scale is being used.

Serial calibration. The device is supplied calibrated and adjusted by our Barcelona calibration laboratory (audited annually by the European notified body NMI).

Technical features

Model	RX Tiger 88 - 300	RX Tiger 88 - 600	RX Tiger 1010 - 600	RX Tiger 1010 - 1,5T	RX Tiger 1210 - 1,5T	RX Tiger 1210 - 3T	RX Tiger 1212 - 1,5T	RX Tiger 1212 - 3T	RX Tiger 1512 - 1,5T	RX Tiger 1512 - 3T	RX Tiger 1515 - 1,5T	RX Tiger 1515 - 3T
Reference	71763	71764	71765	71766	71767	71768	71769	71770	71771	71772	71773	71774
Capacity	300 kg	600 kg	600 kg	1500 kg	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg	1500 kg	3000 kg
Resolution	50 g	100 g	100 g	200 g	200 g	500 g	200 g	500 g	200 g	500 g	200 g	500 g
Weighing units	kg											
Power	Mains 220 V, 50 Hz											
Working temperature	0°C / +40°C											
Structure	Steel with baked epoxy paint											
Load cells	4 H8C Rebel cells											
Junction box	ABS with IP65 protection											
Dim. platform (mm)	800 x 800		1000 x 1000		1200 x 1000		1200 x 1200		1500 x 1200		1500 x 1500	
Minimum height	112				104							
Maximum height	117				119							
Platform net weight (kg)	45		49		64		73		89		105	
Packaging dim.	810 x 810 x 260		1010 x 1010 x 260		1210 x 1010 x 150		1210 x 1210 x 150		1510 x 1210 x 150		1510 x 1510 x 150	
Total weight with packaging (kg)	65		69		76		88		107		127	

External dimensions (mm)

