

DSX



Industrial benchtop scale

For fast response weighing in the food industry or general industry.


- Calculates percentage to check products.
- Fast piece counting for sampling.
- Weight limit alarm, for batch control.
- Weighs in kg or pounds, with quick changeover.
- Zero adjustment by pressing.
- Taring of containers.
- Internal rechargeable battery.
- Overload protection
- Highly resistant, ABS structure.
- Stainless steel plate.
- IP44 protection.
- Height adjustable feet to adapt to surface.

The Accurex DSX scale is for professional use and can withstand robust, intensive handling. It has a rigid, hard-wearing ABS casing with highly reliable internal electronics.





External dimensions (mm)

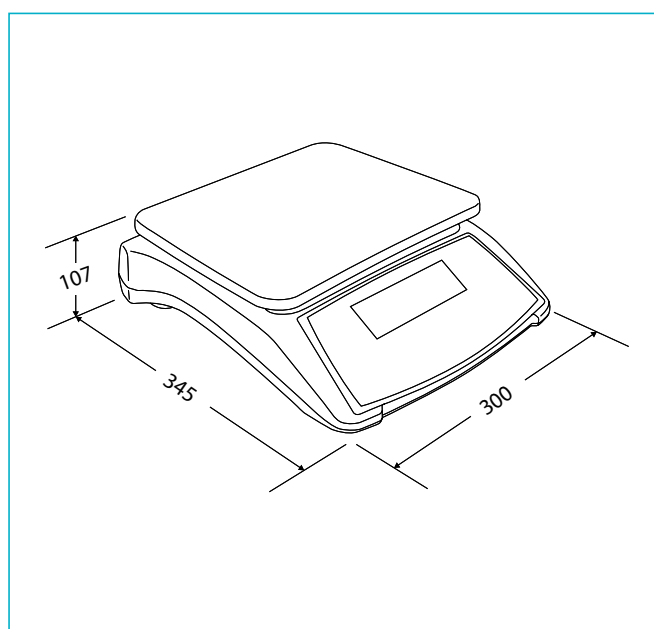

Weighing response is extremely fast, in less than 2 seconds, and shows a stable, accurate weight.

The percentage calculation is for checking and classifying products by their percentage difference from a value in the memory.

It counts pieces with great reliability, from a fast, predetermined sampling, to speed up the counting process.

It has a product weight selection function, with an alarm indicating a value is outside the programmed limit values.

It is powered by a 220 V mains supply and includes an internal battery which is recharged via the mains cable. The battery recharges when connected to the mains while the scale is being used.

Zero adjustment function. Possibility of zeroing the device to zero by pressing a key.

Tare function. The container weight can be deducted by pressing the tare key.

Serial calibration. The device is supplied calibrated and adjusted by our Barcelona calibration laboratory (audited annually by the European notified body NMI).

Technical features

Model	DSX-3	DSX-6	DSX-15	DSX-30
Reference	72071	72072	72073	72074
Capacity	3000 g	6000 g	15000 g	30000 g
Resolution	0.1 g	0.2 g	0.5 g	1 g
Weighing units	kg, lb			
Power	Mains 220 V, 50 Hz			
Working temperature	0° / +40°C			
Structure	ABS and stainless steel			
Load sensors	Aluminium cell			
Weighing plate dimensions (mm)	295 x 230			
External dimensions (mm)	300 x 345 x 107			
Net weight (kg)	3			
Packaging dim. (mm)	327 x 135 x 380			
Total weight with packaging (kg)	4.1			