ACCUREX

C5



Heavy loads lift weighing

High resistance crane scale with wireless remote control for weighing suspended loads up to 10,000 kg.

- High resistance crane scale for heavy loads.
- Capacity from 1,000 to 10,000 kg, readability from 200 g to 5 kg.
- 30 mm red LED display, easy to read from a distance.
- Robust cast aluminium housing.
- Very resistant hook and shackle anchors.
- Waterproof keyboard.
- Wireless remote control for operation at a distance.
- Hold function with last weight memory.
- Accumulation of weighings and piece counting.
- Weighs in kg and pounds.
- Rechargeable 6 V battery, 30 hours of operation, second battery included.

ACCUREX



Wireless remote control
Control the scale at a distance, for more comfort and safety when the load is out of reach.

Second rechargeable battery
Supplied with a second rechargeable battery, so the scale keeps working while the other one is charging.

Bright LED display
Large 30 mm red LED digits remain clearly legible from the ground, from a distance and in poorly lit workshops, yards and warehouses.

Hold function and last weight memory
Freezes the reading on the display so it can be read comfortably even when the load is swinging or out of sight. The last weight measured is kept in memory for later inspection.

Accumulation and piece counting
Adds successive weighings to obtain the total of a series of loads, and calculates the number of pieces from a reference sample.


Built for heavy-duty lifting
Cast aluminium housing with very resistant hook and shackle anchors, designed to withstand intensive use with loads of up to 10 tonnes.

Factory calibrated and certified
Adjusted and verified in our Barcelona calibration laboratory, audited annually by the European notified body NMi. Optional ISOCAL calibration certificates are available on request.

Technical specifications

Model	C5-1T	C5-3T	C5-5T	C5-10T
Reference	60915	60206	60207	60208
Capacity	1.000 kg	3.000 kg	5.000 kg	10.000 kg
Readability	200 g	1.000 g	2.000 g	5.000 g
Weighing units	kg, pound			
Tare range	100%			
Material structure	Cast iron			
Display	LED			
Digits size (mm)	30			
Power supply	3DC - 6V, Rechargeable battery			
Battery duration	30 hours			
Working temperature	+-0ºC / +40ºC			
Hook angle (mm)	30	30	35	48
External dimension (mm)	185 x 510 x 190	185 x 510 x 190	185 x 510 x 190	185 x 695 x 190
Total net weight (kg)	10,2	10,2	15,8	22,5
Packaging dimensions (mm)	610 x 280 x 370	610 x 280 x 370	610 x 280 x 370	610 x 280 x 370
Total weight with packaging (kg)	12,3	12,4	17,9	24,7

External dimensions (mm)

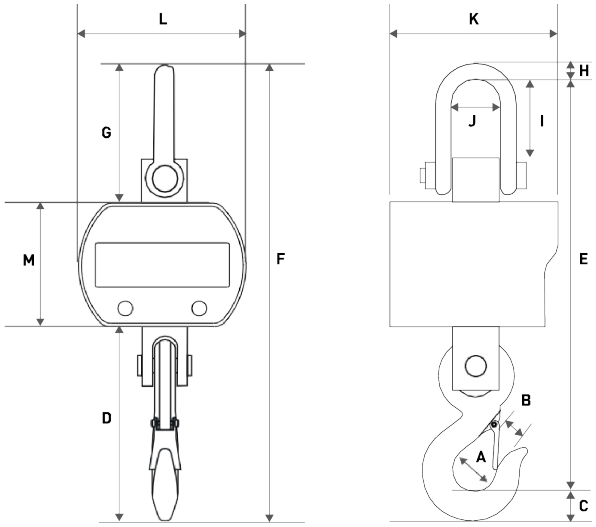

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
C5-1T (mm)	45	30	40	210	460	510	165	25	70	65	190	185	140
C5-3T (mm)	45	30	40	210	460	510	165	25	70	65	190	185	140
C5-5T (mm)	50	35	50	230	470	550	185	30	80	85	190	185	140
C5-10T (mm)	68	48	59	330	600	695	210	35	100	90	190	185	140

001/20261015