ACCUREX

C6



Weighing tool for outdoor use with remote display

Wireless crane scale with IP65 protection for weighing suspended loads up to 30,000 kg from a distance.

- Crane scale with IP65 protection, suitable for outdoor use.
- Capacity from 1,000 to 30,000 kg, resolution from 500 g to 20 kg.
- Wireless remote display, reads the weight up to 100 metres away.
- 30 mm LED display on the hook and on the remote terminal.
- Epoxy coated cast iron housing.
- Hold function for stable reading of suspended loads.
- Accumulation and totalisation of weighings.
- Zero and tare functions, also from the remote control.
- Built-in rechargeable battery, 30 hours of operation.
- Optional C6P remote indicator with integrated printer.

Wireless remote display
Wireless remote control with built-in rechargeable battery, showing the weight and controlling the hook from up to 100 metres away.





Remote printout of weighing results
With the optional C6P remote indicator, weighing results can be printed directly from the control unit, which also operates all the functions of the hook.

Weigh from a safe distance
The hook transmits the weight wirelessly to the remote terminal, so the operator can read and control the weighing up to 100 metres away, out of the lifting area.

Hold function
Freezes the reading on the display so it can be read comfortably even when the load is swinging or out of sight.

Accumulation and totalisation
Adds successive weighings and displays the accumulated total, giving full control over a series of lifts without manual calculation.


Rechargeable battery operation
Both the hook and the remote terminal run on built-in rechargeable batteries with up to 30 hours of operation, and the auto power-off function extends battery life during periods of inactivity.

Factory calibrated and certified
Adjusted and verified in our Barcelona calibration laboratory, audited annually by the European notified body NMi. Optional ISOCAL calibration certificates are available on request.

Technical specifications

Model	C6-1T	C6-3T	C6-5T	C6-10T	C6-15T	C6-20T	C6-30T
Reference	61106	60893	60894	60895	60896	60897	60898
Capacity	1.000 kg	3.000 kg	5.000 kg	10.000 kg	15.000 kg	20.000 kg	30.000 kg
Resolution	500 g	1.000 g	2.000 g	5.000 g	5.000 g	10.000 g	20.000 g
Weighing units	kg, pounds						
Tare range	100%						
Structure material	Cast iron						
IP Protection	IP65						
Display	LED						
Digit height (mm)	30						
Power supply	30C - 6V, rechargeable battery						
Battery life	30 hours						

External dimensions (mm)

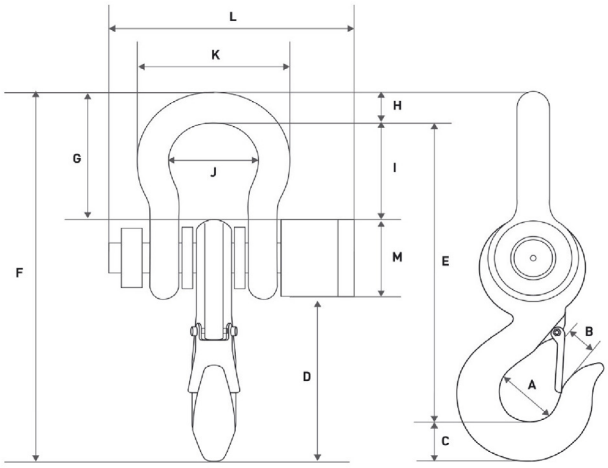

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
C6-1T (mm)	48	32	42	135	250	320	125	29	95	70	130	200	75
C6-3T (mm)	48	32	42	135	250	320	125	29	95	70	130	200	75
C6-5T (mm)	58	40	50	160	490	395	150	35	11	90	160	220	75
C6-10T (mm)	66	45	60	220	360	460	145	39	110	98	185	235	75
C6-15T (mm)	80	58	69	240	420	530	135	45	135	125	220	260	75
C6-20T (mm)	100	65	80	280	490	620	200	51	140	140	250	300	72
C6-30T (mm)	130	80	108	330	600	760	270	65	200	175	300	340	75

001/20261015

Reliable weighing for everyday operations.