ACCUREX

CR



Light And Robust

Compact crane scale for fast, reliable weighing in workshops, warehouses and industry.

- Light and compact crane scale.
- Large LCD display, easy to read from a distance.
- Aluminium housing for CR version.
- ABS housing for CR-S version.
- Waterproof keyboard.
- Very resistant hook and shackle anchors.
- Hold function and last weight memory.
- Piece counting for fast sampling.
- Weight limit alarm, for batch control.
- Internal rechargeable battery.
- Auto power-off to save energy.

Large LCD display
High-contrast digits for clear, comfortable reading, even from a distance.

Water-resistant keypad
Sealed keys protect against splashes, dust and dirt for reliable operation in demanding environments.



Zero adjustment function
Possibility of zeroing the device to zero by pressing a key.

Tare function
The container weight can be deducted by pressing the tare key.

Fast and stable readings
Delivers stable, accurate results within seconds, even with suspended loads, so the operator can read the weight quickly and move on to the next lift.

Hold function and last weight memory
Freezes the reading on the display so it can be read comfortably even when the load is swinging or out of sight. The last weight measured is stored in memory and can be recalled at any time.

Piece counting
Counts parts from a reference sample, useful for quick stock checks of hooks, fittings and other small items weighed in bulk.


Portable battery operation
Runs on three standard 1.5 V batteries with approximately 30 hours of operation, and the auto power-off function switches the scale off during periods of inactivity to extend battery life.

Factory calibrated
Adjusted in our Barcelona calibration laboratory, audited annually by the European notified body NMi. Optional ISO-CAL calibration certificates are available on request.

Technical specifications

Model	CR-30	CR-150	CR-300	CR-30S	CR-150S	CR-300S
Reference	6072	60252	6074	60815	60816	60817
Capacity	30 kg	150 kg	300 kg	30 kg	150 kg	300 kg
Readability	10 g	50 g	100 g	10 g	50 g	100 g
Weight units	g, pound, newtons					
Tare range	100%					
Material structure	Aluminium			ABS		
Display	LCD					
Digits size (mm)	15					
Power supply	3 batteries type AA / -4 -1,5V					
Working temperature	+-0ºC / +40ºC					
Hook angle (mm)	20					
External dimension (mm)	270 x 87 x 50					
Total net weight (kg)	0,7			0,5		
Packaging dimensions (mm)	260 x 60 x 165					
Total weight with packaging (kg)	1,2			0,9		

External dimensions (mm)

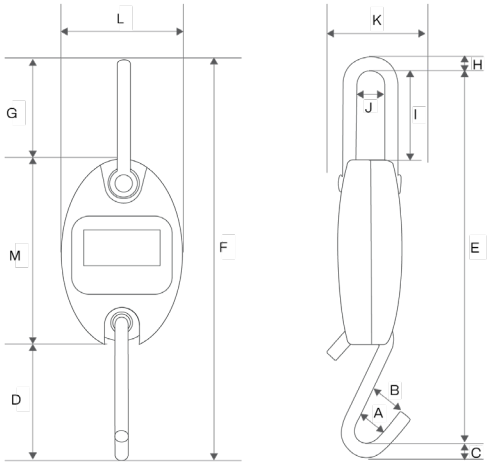

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
CR-30 (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140
CR-150 (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140
CR-300 (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140
CR-30S (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140
CR-150S (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140
CR-300S (mm)	20	20	10	85	270	290	70	10	60	21	50	87	140

002/20260910

Reliable weighing for everyday operations.